

Punto Plus 9 & Punto Plus 9 CC

Bodyshop Welding Systems




welding & joining technologies



Punto Plus 9	
Rated Power @ 50%	9 KVA
Max Power	96 KVA
Fuses at 400 v 50Hz	32 Amp
Secondary No Load Voltage	6.5 V
Max secondary welding current	13,500 Amps
Secondary Short Circuit Current	15,000 Amps
Duty Cycles	9%
Welding Capacity On Mild Steel	3 x 2.5 mm
Electrode Force At 6.5 bar	455 daN
Electrode Force At 8.0 bar	560 daN
Water cooling	Built In
Throat Depth	120mm
Electrode Arm Diameter	25mm
Electrode Arm Length	120mm—600mm
Electrode Stroke	12 + 55mm
Working Height	2500mm
Max Radius	2300mm
Dimensions Rest Position WxLxH	1030x815x1250mm
Welding Gun Dimensions WxLxH	130x350x410mm

The PUNTO range of bodyshop welders are fitted with a mobile balancing arm enabling the operator to raise and manoeuvre the gun without any effort.

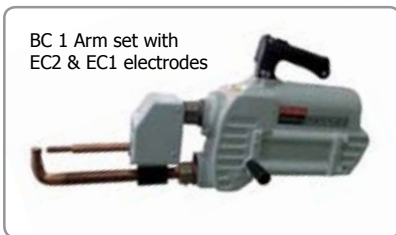

BC 1 Arm set with EC2 & EC1 electrodes



The X gun is available with 20mm cap electrodes or 13mm.

An attachment DPC can be fitted to the X gun to convert to C gun.

PUNTO PLUS 9 CC

As above specification but with Multi program welding control and proportional valve.



Prospot Limited - Unit C Riverside Industrial Estate
 Atherstone Street - Fazeley - Tamworth - Staffordshire - B78 3RW
 Telephone: 01827 254 829 - Fax: 01827 254 832
 Email: sales@prospot.co.uk - Web: www.prospot.co.uk