




SRT 11

SQ/A 121

SQ/AS 121

SQ/AS 100

PRÍSLUŠENSTVO




SADA ELEKTRÓD PRE SRT 11



SADA ELEKTRÓD PRE SQ/AS 121



RIADIACA JEDNOTKA WS 708

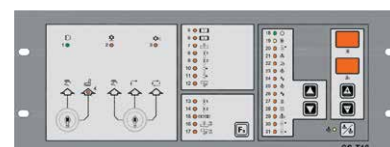

RIADIACA JEDNOTKA CS-T 10

		SRT 11	SQ/A 121	SQ/AS 121	SQ/AS 62	SQ/AS 100
Max. kapacita	Fe mm ²	50	200	250	380	550
Max. zváracia sila nízkouhlíkovej ocele	Fe Ø min	1.5	3	5	10	12
	Fe Ø max	8	16	16	22	26

TECHNICKÉ ÚDAJE		STLÁČACIE ZVÁRAČKY				ODTAVOVACIE ZVÁRAČKY		
		SRT 11	SQ/A 121	SQ/A 62	SQ/A 100	SQ/AS 121	SQ/AS 62	SQ/AS 100
Napájanie	V 50 Hz					400		
Menovitý príkon pri 50 %	kVA	4	25	60	100	25	60	100
Max. zvärací výkon	kVA	18	122	168	350	122	201	345
Inštalovaný výkon	kVA	4	15	80	120	15	60	100
Istenie	A	10	40	200	300	40	100	250
Sekundárne napätie	V	2.2	5.1	6.0	10.8	5.1	6.0	10.8
Skratový prúd	kA	10	30	35	40	30	—	—
Upínacia sila	daN	150	900	3 000	5 150	1 350	2 100	5 150
Prítlačná sila	daN	58	350	1 800	2 400	450	1 200	2 400
Rozmery (š × v × h)	mm	600 × 1 100 × 620	640 × 1 460 × 830	1 750 × 1 900 × 850	1 750 × 2 100 × 850	920 × 1 600 × 830	1 750 × 1 900 × 850	1 750 × 2 100 × 850
Hmotnosť	kg	84	280	1 200	1 300	300	1 200	1 300
Sada kolies	—	—	—	—	—	—	—	—